


Thank you for acquiring the Aqua View Finder from Aquatica Part # 20054, the viewfinder optics are made from high quality coated glass elements and as such should be treated with the same respect as your camera lenses or any precision optical tool; the casing is machined from aircraft quality aluminium and anodized for protection against salt water corrosion.



Your Aqua View Finder is supplied with the following : One Soft carrying pouch, a protective cap, an allen key and a spanner wrench for eyesight adjustments.

Users of Aquatica D200 housing having serial number 224 or earlier might have to replace the metering pattern selector knob with the one supplied, a simple operation in itself. A : remove the actual knob with the supplied allen key, B : with the camera installed inside the housing properly push the shaft down until it makes contact with the camera meter control, C : install the newer knob version using the provided washer as a shim, tighten the set screw and remove the shim. you are now ready to install the Aqua View Finder

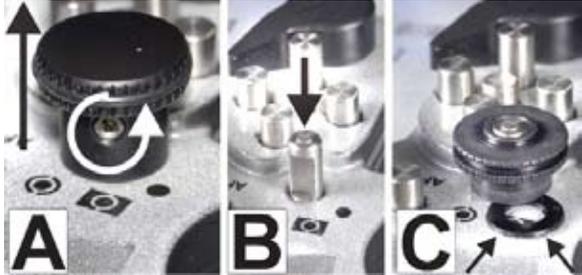

There is no user serviceable parts on the inside of the viewfinder so there is no reason for attempting to open the viewfinder, failure to comply could cause damage to the unit and or flooding of the unit and its housing.

Following are simple steps for the installation of the Aqua View:

First : If your housing has a regular eyepiece installed already, it must be removed, remove the back of your housing and place on a clean and dry surface, on the inside locate the eye piece collar, and you should notice a rubber O-ring protruding from it. Remove the O-ring with either an O-ring tool or a dull pointed object, making sure not to cut it. Once the O-ring is removed, push the eyepiece out by pressing on it with both thumbs from the inside.

Remove the orange coloured O-ring from the collar, flip the housing back cover so that you are facing the external part of it, inspect and apply a light coat of lubricant on the wall of the viewfinder sealing surface of the housing making sure it is clear of debris, inspect carefully the two remaining O-ring from the Aqua View Finder to insure they are clean and lubricate them, remember that a light coat is all that is needed, the O-ring does the sealing, not the lubricant. The user as the responsibility to make sure that all O-rings as well as the viewfinder are cleaned and properly installed.


Insert the Aqua View Finder by slightly rotating left and right. You will notice a small stainless steel alignment pin, there is a matched cut-out on the external collar of the Aqua View Finder, this pin should come to rest in that cut-out.

Finally flip the housing back cover over and reinstall the orange coloured O-ring on the Aqua View Finder internal collar. As always is the case when installing components such as ports, extension and viewfinder, the user should immerse the housing with out the camera to confirm that all was done properly

Warning : When travelling always remove the eyepiece from the housing and **never** lift or carry the housing using the Aqua View Finder as a handle. It is your responsibility to advise people handling your equipment accordingly. Treat your eyepiece with care and store in a padded container or lens bag.

Note: in the event you're housing has a non user removable eyepiece, please contact Aquatica at info@aquatica.ca for the possibility of modifying your housing to accept the Aqua View Finder.

Eye piece adjustment : It is possible to adjust The Aqua View Finder to one's eyesight, to adjust you will require the tools supplied with your Aqua View Finder, first make sure that the eyesight adjustment of your camera is properly adjusted to your eye, to do this refer to the camera user manual, if adjustment are still required then start by selecting an object located far away (building with detail, etc.), loosen the set screw (A) using the allen key, next rotate the optic barrel (B) in small increment using the tool supplied (C), when properly adjusted said object should appear clear, once this is done, mount you Aqua View Finder on your housing, the information (shutter speed, aperture etc.) in your view finder should be clear and sharp, remember to use small increments.

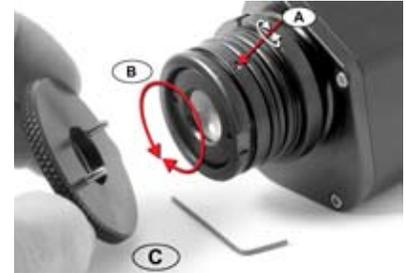


Optional accessories :

Product # 19216 : Hard protective case (see photo)

Product # 19213 : Aquatica Lubricant for O-rings



- 1: Allignment pin slot
- 2: Retaining O-ring removal slot
- 3: Adjustment holes for spanner wrench
- 4: Optical barrel locking set screw
- 5: Retaining O-ring
- 6: Sealing O-rings (x2)

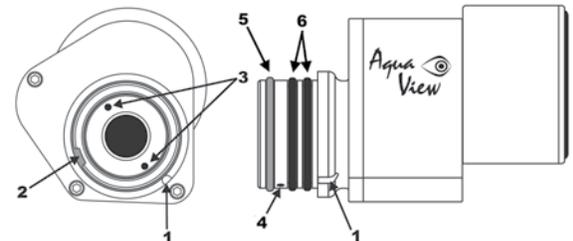

AQUATICA

3025 De Baene St., Montreal, Quebec, Canada, H4S 1K8
Tel.: 514-737-9481 info@aquatica.ca Fax : 514-737-7685